




- Sound Output: 105dB(A)
- 32 Tone
- Light Output: N/A
- Light Source: LEDs
- IP Rating: 56
- Available LED colours: Amber Blue Clear Green Opal Red
- Available Voltages: 12Vdc 18Vdc 24Vdc
- Connected via an ATEX approved safety barrier or galvanic isolator
- Monitoring facility

<b>Sound output</b>	105dB(A)
<b>Light output</b>	N/A
<b>IP rating</b>	56
<b>Alarm tones</b>	32
<b>Alarm stages</b>	2
<b>Volume control</b>	T4 units only
<b>Light source</b>	8 x LEDs
<b>Cable entry</b>	M20 knockouts
<b>Terminal capacity</b>	0.5 to 2.5mm <sup>2</sup> cables
<b>Operating temp.</b>	-25°C to +40°C
<b>Relative humidity</b>	95% at 40°C
<b>Body material</b>	ABS, flame retardant
<b>Body colour</b>	Red flame
<b>Lens material</b>	Polycarbonate
<b>Lens colour</b>	Amber, Blue, Clear, Green, Opal, Red
<b>Assembly parts</b>	Stainless steel
<b>Unit weight</b>	1.1Kg

Please specify if standard device (ISC) or opto-coupled second sound stage only device (ISD) is required when ordering

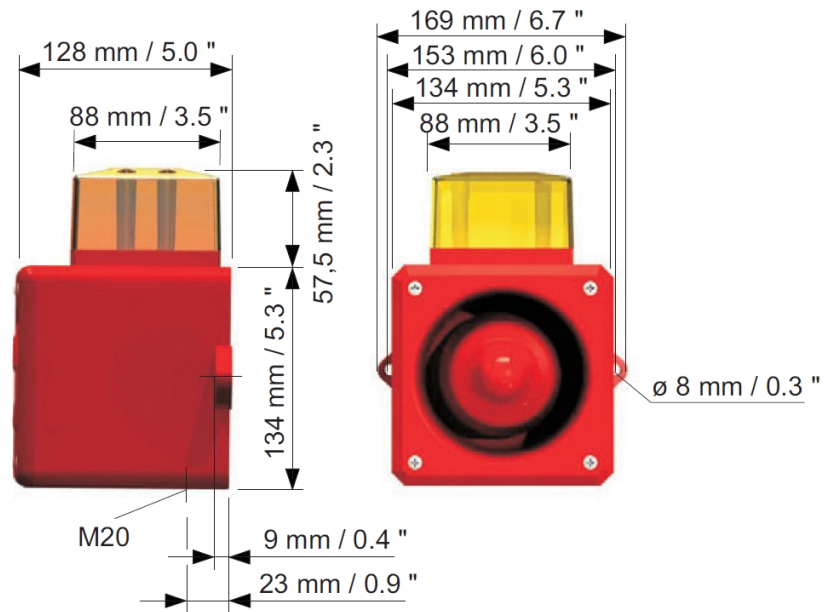

Voltage	Voltage Range
12 Vdc	12 to 24 Vdc
18 Vdc	12 to 24 Vdc
24 Vdc	12 to 24 Vdc

### Approvals:

#### ATEX:

Baseefa08ATEX0194X to EN60079-0, EN60079-11

Ex II 1G Ex ia IIC T4

Ex II 1G Ex ia IIC T6



Also available YL4IS