




K-SML15 Installation



Connections

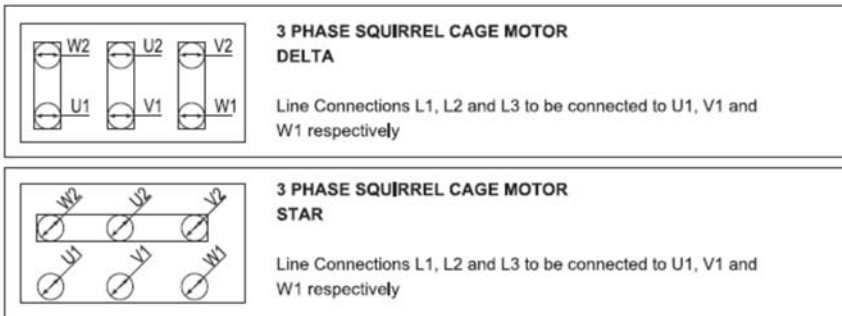


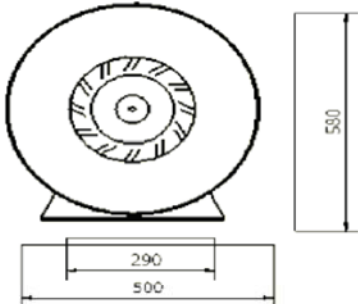



Extended temperature of 50°C for a maximum period of 15 minutes run time

Rated Output	7.5		
Voltage	220/230	380/400	525/550
Current (A)	N.A.	13.6	10.4
Leads	See connections		
IP Rating	IP 45		

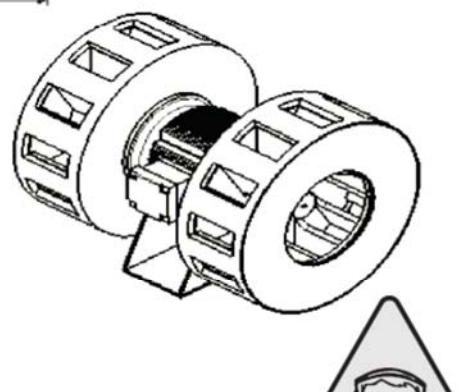

INSTALLATION INSTRUCTIONS

Please Note :

Disconnect from power source to prevent electrical shock before installing or servicing unit
 No liability is accepted for any consequence due to the incorrect use of this document
 Technical specifications of the unit subject to change without prior notice caused by on going product engineering
 All dimensions are approximate and subject to change.
 Servicing and / or replacements of parts by qualified electricians recommended

Fitment :

For fitment of unit bolt unit with suitable HT bolts on mounting foot.
 Lead connections as indicated above for specific model purchased in motor terminal box
 Contact qualified electrician for correct contactor selection for application or if adding to existing system
 Seal unit with all screws and o-ring again on completion before powering unit up.