

MBA

Weatherproof Fire Alarm Bell

Datasheet Version 1.2



Output: 100.5/100.1dB(A)

6" or 8" gong

IP rating: IP55

Available voltages: 24Vdc

Audio visual
signalling






MBA


Weatherproof Fire Alarm Bell

Datasheet Version 1.2

- Sound output** 6": 100.5dB(A)
 8": 100.1dB(A)
- Alarm tones** 1 (traditional bell)
- IP rating** IP55
- Mounting** Single back box or direct wall mount
- Unit weight** 6": 780g
 8": 1100g
- Operating temp.** -10°C to +50°C
- Humidity range** 45-85%
- Gong material** Aluminium
- Unit colour** Red
- Approvals** LPCB

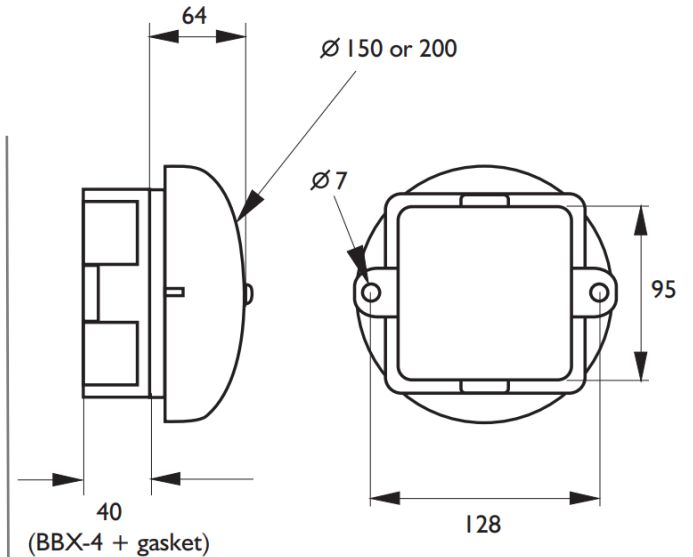

Version	Voltage	Current @ 24v
6"	24Vdc (20.4-27.6)	12mA
8"	24Vdc (20.4-27.6)	25mA

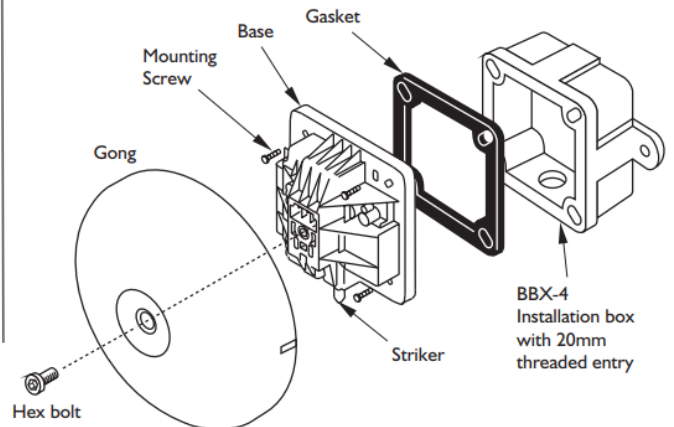

Tel: +44(0)1252 725257

Fax: +44(0)1252 727627

© 2018/19 LGM Products Ltd.

Email: sales@lgmproducts.com

Web: www.lgmproducts.com

ISO 9001:2015 certified

Address: LGM Products Ltd, Unit 15 Riverside Industrial Park, Farnham, Surrey, GU9 7UG, United Kingdom.